



Double Coated Adhesive Tape MP711

Technical Data Sheet

Product Description

MP711 Double Coated Adhesive Tape is consist of flexible non-woven backing and Transparent acrylic water base adhesive

Construction

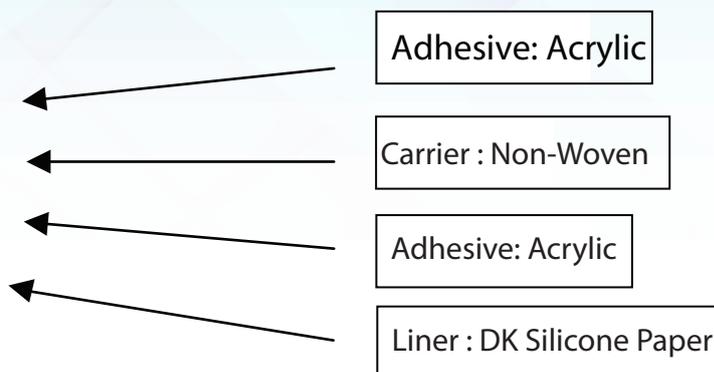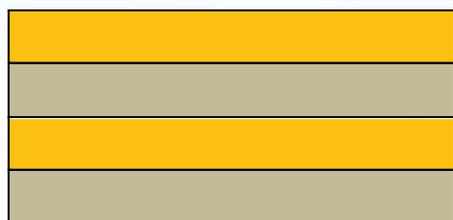

Typical Physical representative

Note: The following technical information and data should be considered

Properties and Performance Characteristics

For typical only and should not be used for specification purposes for reference Final using customer me considering by themselves.

Properties	Value
Tape color	Translucent
Tape thickness : (mm)	0.09mm
180 degree Peel Adhesion : Initial adhesion (lb/inch) ASTM D3330	
- Stainless steel	6.3
- Aluminum	6.5
- Polypropylene	3.7
180 degree Peel Adhesion : 72 hrs dwell time (lb/inch) ASTM D3330	
- Stainless steel	6.7
- Aluminum	6.5
- Polypropylene	3.8
Tensile strength (lb/inch)	4.4
Relative High Temperature operating range	80 C for 2 weeks
Shelf life of the tape in roll form	12 months from date of delivery

Feature

- Good adhesion to variety of substrate.
- Easy converting by die cut
- Good roll stability
- Good for lamination with paper & plastic

Application idea

MP 711 is designed for use as laminating adhesive for industrial materials such as metal, plastics, paper, rubber, textile, felt, plywood, etc.

For Additional

To request additional product information or to arrange for sales assistance, call 662-5142635
Address correspondence to :MARKPAK LIMITED.

MarkPak Limited : 572 Bodinplaza Building 2Fl, Room 1208 Soi Ladpao 112, Ladpao Rd.
Wangthonglang, Wangthonglang, Bangkok 10310 Thailand.

Important Notice

COMPANY MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

User is responsible for determining whether the product is fit for a particular purpose and suitable for user's method of application. Please remember that many factors can affect the use and performance of company standard products in a particular application. The materials to be bonded with the product. The surface preparation of those materials, the product selected for use the conditions in which the product is used. and the time and environmental conditions in which the product is expected to perform are among the many factors that can affect the use and performance of a company standard product. Given the variety of factors that can affect the use and performance of a company standard product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluate the company standard product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

Limitation of Remedies And Liability

If the company products is proved to be defective, THE EXCLUSIVE REMEDY, AT COMPANY'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE COMPANY PRODUCT. COMPANY shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.



MARKPAK LIMITED

Raw Material Division

572 Bodinplaza Building 2Fl, Room 1208 Soi Ladpao 112, Ladpao Rd. Wangthonglang,
Wangthonglang, Bangkok 10310 Thailand.

Tel : 662-5143635 Fax 662-5143634 Email : Cusromercare@markpak.com