


Soken Tape AS-5000

Technical Data Sheet

General Description Soken Tape AS-5000 is double coated non-woven fabric adhesive tape with low Volatile Organic Compounds (VOC) content and high performance acrylic adhesives that provides good initial tack and offers high ultimate adhesion

Product Construction

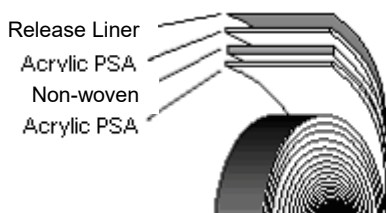

Tape Thickness: 0.14 mm

Characteristics

- Low Volatile Organic Compounds (VOC) double-sided tape with far lower VOC content compare to usual products in total
- Raw materials does not include 13 substances of the guideline of the Japanese Ministry of Health, Labor and Welfare
- High adhesion with good balance of holding power and tack
- Excellent performance under a wide range of temperature condition
- High adhesion to metal, glass and plastics including PP and other various surfaces

Applications

- Automotive interior plastic parts, electronic product, nameplates, etc.
- Bonding of membrane switch and duct seal of air conditioner
- Apply to shock-absorbing foam and other general industry use

Properties

Test Item	Value	Test Procedures
Peel Strength (N/m)	980	180 degree peel at 300mm/min, 23 °C65%RH, to test plate, 20min conditioning time
Holding Power (mm)	0.7	1kg weight held for 1 hour to SUS with 20×20mm overlap area at 40°C, 20min conditioning time
Ball tack	28	23 °C 65%RH, according to J Dow method

VOC Content

Product Name	AS-5000	A-500
Base Solvent	Toluene-free type	Toluene type
Thickness (μm)	140	140
TVOC (mg/m ²)	1.8	120
Toluene (mg/m ²)	0.3	90

Shelf Life

Six months from the date of receipt by customer when stored in the original packaging at less than 40°C and up to 70% Relative Humidity

DISCLAIMER: The above figures are taken from experiments conducted under standard conditions at Soken Chemical Asia Co.,Ltd. They are not meant to be guaranteed values, to serve as reference only. Thorough evaluation of the actual application of Soken Tape must be conducted before use.